


# FIMAFY

Filtering technologies for  
microalgae and sustainable high-  
quality feed for fry

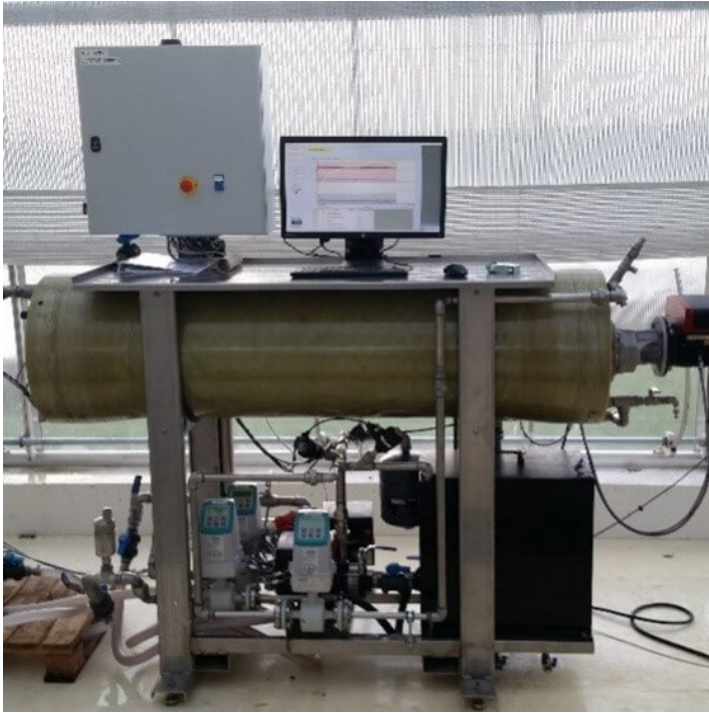

## **FIMAFY**

**Development of filtering technologies for microalgae and sustainable high-for fry.**

There is an urgent need for alternative resources to fishmeal and fish oil to produce for the aquaculture industry. The resource problem is due to the rapid growth of aquaculture fact that catches of fish for the feed industry are stagnating. The idea to use microalgae feed originated from an ongoing EU project, which demonstrates that algae can be processed with water from the industry.

FIMAFY has employed strategies to provide a clear concept for microalgae up-and-downstream processing, investigated the shelf-life stability of the dried biomass, and finally evaluated biomass as a fish feed ingredient. Pre-Gasified industrial process water with a high concentration of ammonia and free from toxic compounds, representing effluent from a local biogas plant, was used as a low-price growth medium. In this study, an innovative downstream processing technology was developed. The process setup includes crossflow microfiltration (MF) by silicon carbide ceramic membranes, up-concentration by bowl centrifuge, and finally delicate drying of biomass by a novel swirl(spin) flash dryer. Harvest trials have been performed on eight microalgae species

(*Monodopsis subterranean*, *Nannochloropsis salina*, *Dunaliella salina*, *Phaeodactylum*, *Chlorella Vulgaris*, *Chlorella sorokiniana*, *Chlorella pyrenoidosa*, and *Desmodesmus*)

All the species showed the same flux pattern while the performance of the harvest was species-dependent. The recovery efficiencies were higher or equal to 98%, while no fouling was observed. The filtration VCR (volume concentration ratio) for microalgae harvest was between 10-30, depending on the species cell size, shape, and other parameters. They have also been successfully tested on a large scale for *Nannochloropsis salina*. Energy consumption in this processing technology is estimated at 28% lower than known current processing technologies applied to microalgae. These findings represent the SIC-UF membrane filtration as a robust and feasible technique for the downstream processing of microalgae.

## Participants

- BioMar A/S, Denmark
- LiqTech International A/S
- IFAU, Denmark
- Ecolipids A/S
- DTU Food
- DTU Aqua



## Want To Know More?

**If you want to know more about the FIMAFY project or any other project, please do not hesitate to contact us.**

First Name\*

Last Name\*

Company / University Name\*

Country/Region

Email\*

Phone number\*

Message

Don't miss out on news and inspiration for a more sustainable future.


Sure, sign me up for LiqTech's newsletter too!

In order to send you product-related content, we have to store and process your data. You may, at any time, withdraw your consent. If you want to know more about how we store and process your data, please visit our [privacy policy](#).

I agree to let LiqTech store and process my data.\*

**SEND**



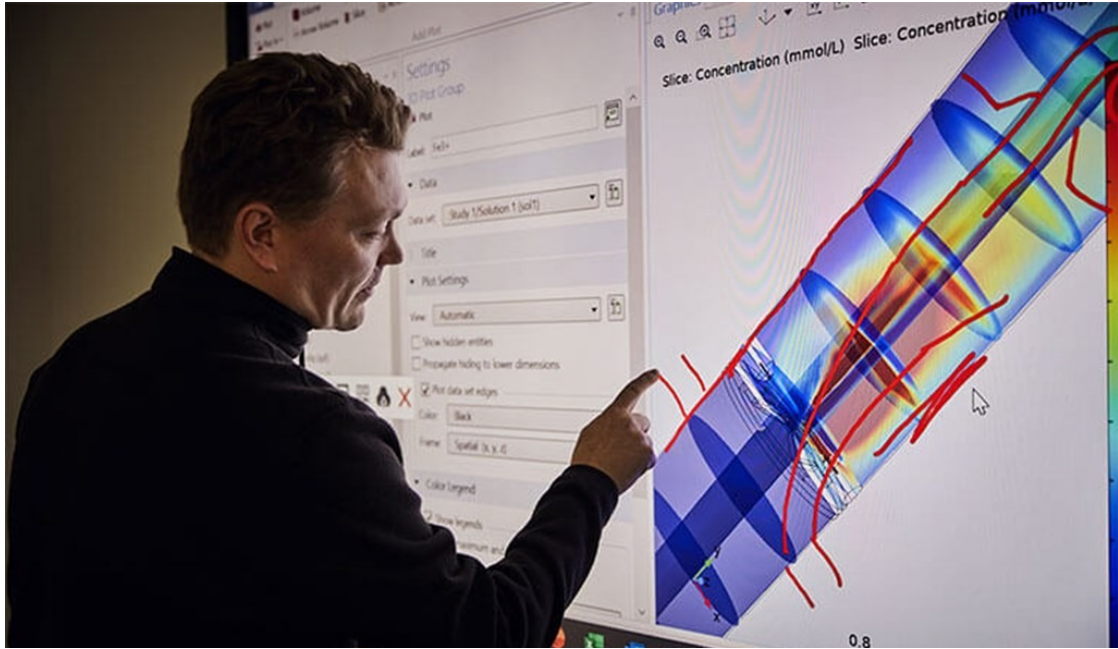

## See more innovation projects

**Go back to our innovation section and learn more about our interesting projects.**

Maybe you would like to learn more about removal of pollutants present in very small amount in aqueous systems? Or cutting edge technologies to separate water and organic material from pelagic industries effluents?